


Silicone Neon Flex LED Strip Series




feature:

1. side bending- flat neon flex. Uniform light, no facula (Two-color silicone extrusion);
2. Stronger holder of LED, LM80 qualified; 3OZ copper PCB, real uniform even light without voltage drop;
3. Visual cutting window/A variety of colors available/IP67/3-years quality warranty;
4. Silicone and LED strip co-extrusion technology, food-grade environment friendly silicone material, with weather resistance, UV resistance, salt spray resistance and corrosion resistance;
5. Working/Storage Temperature: -20°C~45°C/-25°C~65°C;
6. UCE, CQC, ROHS certificates ;

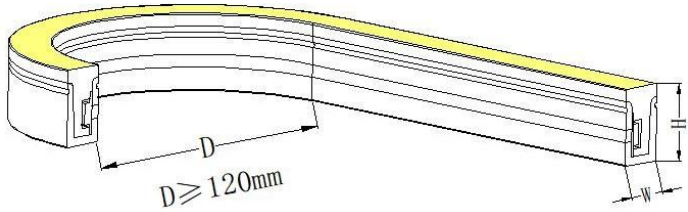


application


- Indoor/outdoor lighting ;
- Building contour lighting ;
- bathroom/boat/truck profile lighting.




T0410C




S0612C




S0817C



S1018C






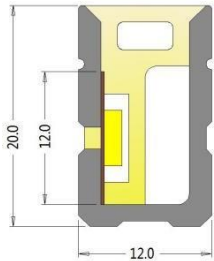


S1220C

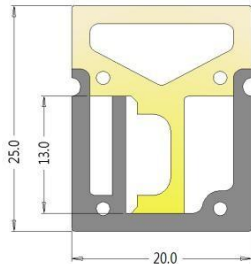


T2025C

specification

Item name	section picture	bending direction	CCT	FPC width	LED type	led qty /m	minimum cut	power /m	voltage	beam angle	IP	wiring method
T0410C		side bending square	single color	6mm	2835	168pcs/m	7pcs/41.7mm	7W/M	DC24V	120°	IP 67	straight exit cable 0.2M
S0612C		side bending square	single color	8mm	2835	120pcs/m	6pcs/50mm	9W/M	DC24V	120°	IP 67	Straight/bottom 0.2M
			RGB	8mm	3838 RGB	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP 67	Straight/bottom 0.2M
S0817C		side bending square	single color	8mm	2835	120pcs/m	6pcs/50mm	9W/M	DC24V	120°	IP 67	straight exit cable 0.2M
			RGB	8mm	3838 RGB	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP 67	straight exit cable 0.2M
S1018C		side bending square	single color	10mm	2835	120pcs/m	6pcs/50mm	12W/M	DC24V	120°	IP 67	straight /side 0.2M
			RGB	10mm	5050 RGB	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP 67	straight /side 0.2M
S1220C		side bending square	single color	12mm	2835	120pcs/m	6pcs/50mm	15W/M	DC24V	120°	IP 67	straight exit cable /side cable/bottom cable 0.2M
			RGB	12mm	5050 RGB	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP 67	straight exit cable /side cable/bottom cable 0.2M
T2025C		side bending square	single color	12mm	2835	120pcs/m	6pcs/50mm	15W/M	DC24V	120°	IP 67	straight exit cable 0.2M
			RGB	12mm	5050 RGB	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP 67	straight exit cable 0.2M

note:standard single color为 2700K,3000K,3500K,4000K,6400K,R,G,B,Y

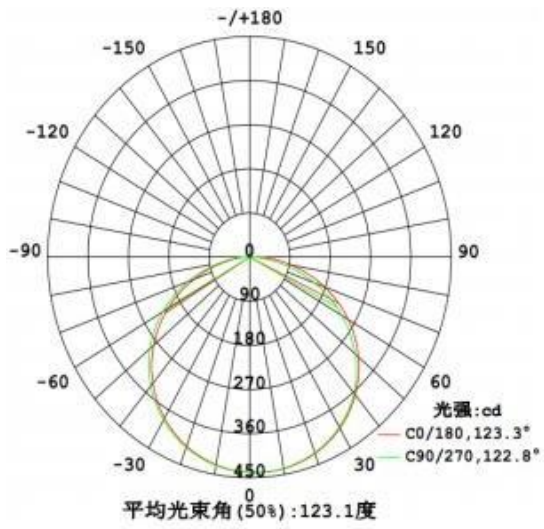


光通输出: 180.2 lm

高度	Eavg, Emax	光束角: 107.96度	直径
1.219m	20.37, 58.10lx		335.39cm
2m	7.570, 21.59lx		550.18cm
3m	3.364, 9.59lx		825.27cm
4m	1.892, 5.39lx		1100.36cm
5m	1.211, 3.45lx		1375.45cm
6m	0.8411, 2.39lx		1650.54cm
7m	0.6179, 1.76lx		1925.63cm
8m	0.4731, 1.34lx		2200.72cm
9m	0.3738, 1.06lx		2475.81cm
10m	0.3028, 0.86lx		2750.89cm


Distribution curve flux

effective mean illumination


bending direction

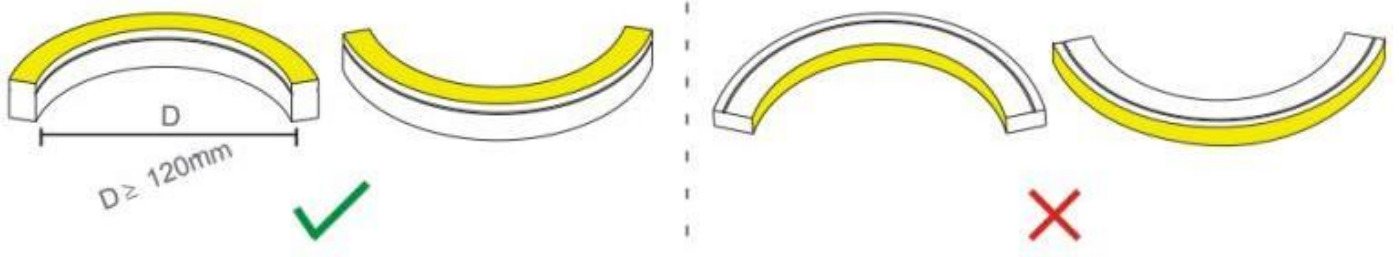


installation section

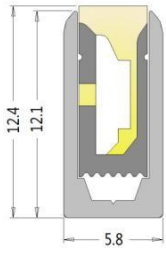


T0410C




S0612C

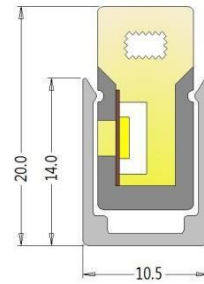


S0817C

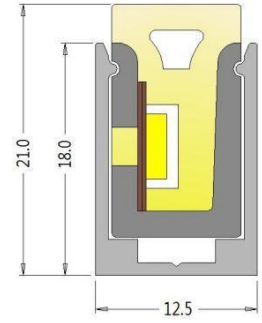

S1018C

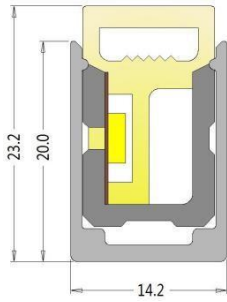


S1220C

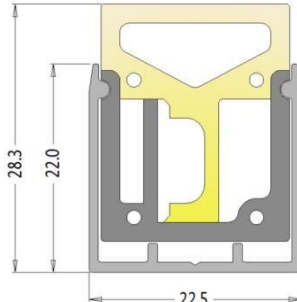


T2025C


Parts option




straight exit end cap




aluminum profile keel




side end cap




bottom end cap




end cap



aluminum clip



cable



glue