



Silicone Neon Flex LED Strip Series

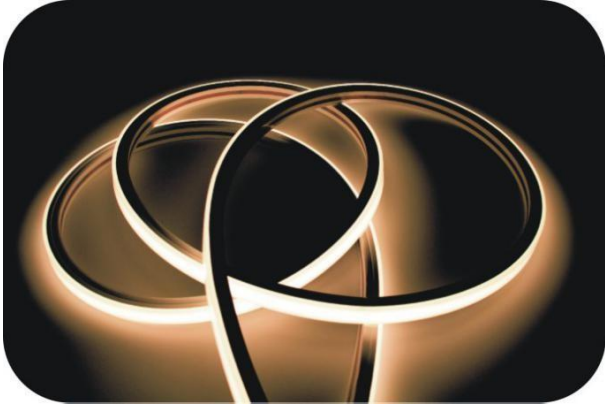

feature:


- 1. side bending- flat neon flex. Uniform light, no facula (Two-color silicone extrusion);
- 2. Stronger holder of LED, LM80 qualified; 3OZ copper PCB, real uniform even light without voltage drop;
- 3. Visual cutting window/A variety of colors available/IP67/3-5years quality warranty;
- 4. Silicone and LED strip co-extrusion technology, food-grade environment friendly silicone material, with weather resistance, UV resistance, salt spray resistance and corrosion resistance;
- 5. Working/Storage Temperature: -20°C~45°C/-25°C~65°C;
- 6. UCE, CQC, ROHS certificates ;

Bending Direction

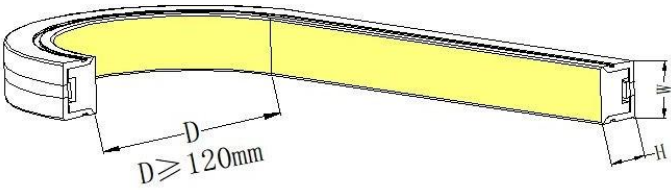


application


- Indoor/outdoor lighting ;
- Building contour lighting ;
- bathroom/boat/truck profile lighting.




S1010A




T1212A




S1313A




S1616A



T2014A







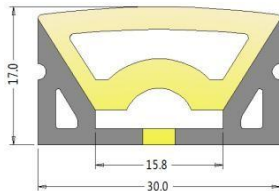


T3016A1

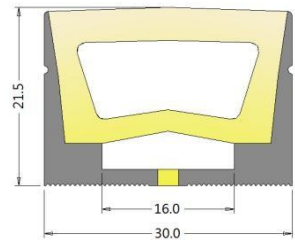



T3021A

Specification

Item name	section picture	bending direction	CCT	FPC width	LED type	led qty /m	Min cut	power/ m	Voltage	beam angel	IP	wiring method
S1010A		top bending	single color	8mm	2835	168pcs/m	7pcs/41.7mm	9W/M	DC24V	120°	IP67	straight exit cable /side cable/bottom cable 0.2M
			RGB	8mm	3838	120pcs/m	6pcs/50mm	12W/M	DC24V	120°	IP67	straight exit cable /side cable/bottom cable 0.2M
T1212A		top bending	single color	8mm	2835	120pcs/m	6pcs/50mm	9W/M	DC24V	120°	IP67	straight exit cable 0.2M
			RGB	8mm	3838	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP67	straight exit cable 0.2M
S1313A		top bending	single color	10mm	2835	120pcs/m	6pcs/50mm	12W/M	DC24V	120°	IP67	straight exit cable /side cable/bottom cable 0.2M
			RGB	10mm	5050	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP67	straight exit cable /side cable/bottom cable 0.2M
S1616A		top bending	single color	12mm	2835	120pcs/m	6pcs/50mm	12W/M	DC24V	120°	IP67	straight exit cable 0.2M
			RGB	12mm	5050	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP67	straight exit cable 0.2M
T2014A		top bending	single color	12mm	2835	120pcs/m	6pcs/50mm	12W/M	DC24V	120°	IP67	straight exit cable /side cable/bottom cable 0.2M
			RGB	12mm	5050	96pcs/m	6pcs/62.5mm	12W/M	DC24V	120°	IP67	straight exit cable /side cable/bottom cable 0.2M
T3016A1		top bending	single color	14mm	2835	240pcs/m	12pcs/50mm	18W/M	DC24V	120°	IP67	straight exit cable 0.2M
			RGB	14mm	3838	192pcs/m	12pcs/62.5mm	24W/M	DC24V	120°	IP67	straight exit cable 0.2M
T3021A		top bending	single color	14mm	2835	240pcs/m	12pcs/50mm	18W/M	DC24V	120°	IP67	straight exit cable 0.2M
			RGB	14mm	3838	192pcs/m	12pcs/62.5mm	24W/M	DC24V	120°	IP67	straight exit cable 0.2M



note:standard single color为 2700K,3000K,3500K,4000K,6400K,R,G,B,Y

distribution curve flux

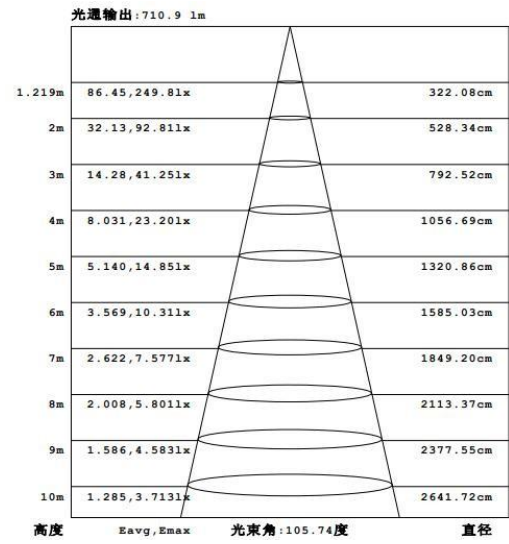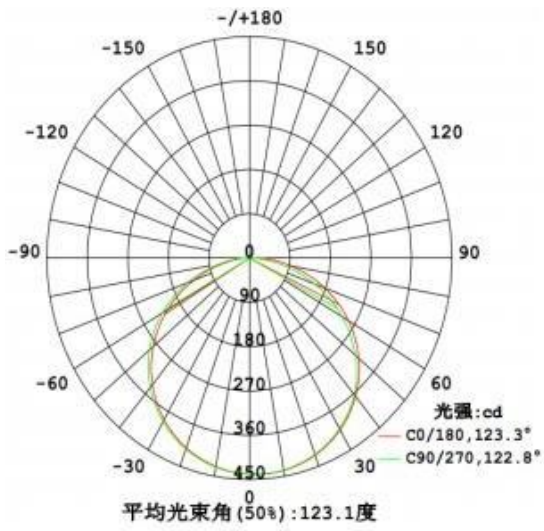


effective mean illumination


bending direction

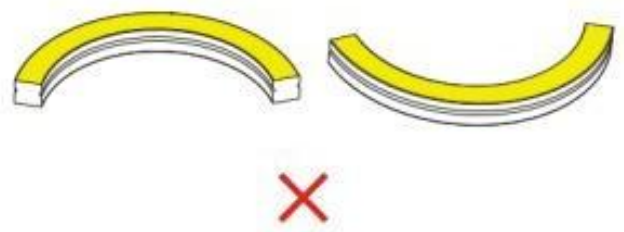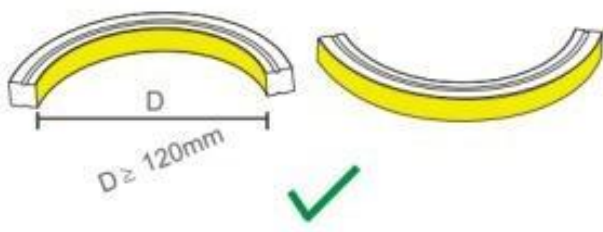


Installation section




S1010A




T1212A

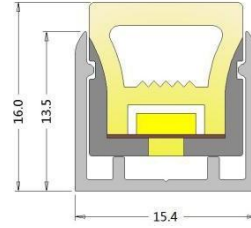


S1313A

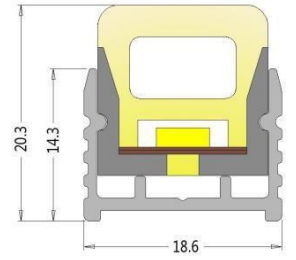


S1616A

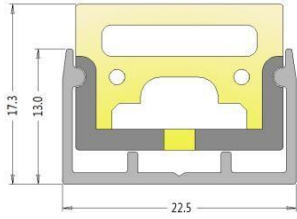

T2014A

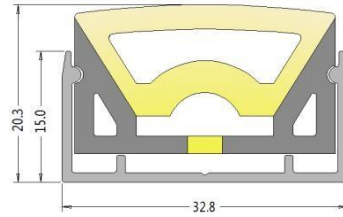


T3016A1

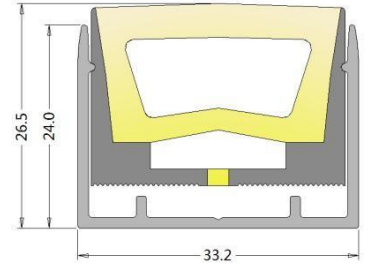


T3021A


Parts option




straight exit end cap




side end cap




bottom end cap



end cap




aluminum clip



aluminum profile



keel



cable



glue